
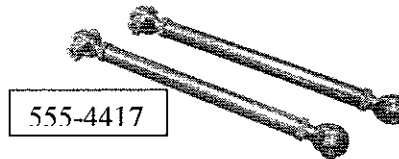


L Laske

Steeda 2005 Mustang Street & Race (555-4416) Race (555-4417) Lower Trailing Arms Installation Instructions

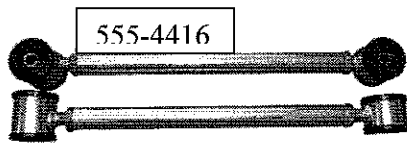

1. Follow all safety rules and use caution whenever working on any vehicle. It is best to consult a shop manual for your vehicle before beginning this project. Failure to do the job correctly could result in serious injury. Read all of the instructions before you start. Have the job done by an experienced technician if you are not sure you can complete it correctly.

2. Raise the vehicle by supporting it on a lift or stand so that the rear suspension is loaded (wheels in contact with surface). **Note: Do one side at a time.**

3. Remove the stock lower trailing arm bolts and the rear brake cable that is routed through the arm.



4. Carefully measure the distance between the centers of the mounting holes of the stock trailing arms. Adjust the length of the Steeda adjustable arms to match the factory length. **It is very important to make sure the right and left side arms are the exact same length.**

5. **Grease the outside edges of the bushings with a quality synthetic grease such as synthetic wheel bearing grease or marine grease. Do not skip this step or the bushings may squeak. (Street & Race Only)**

6. Install the arm with the thicker end of the trailing arms mounted at the axle with the offset side toward the driveshaft. When installing the Steeda arms to the frame be sure to install the large included steel washer between the bushing and the frame on the outside mating surface.

7. Tighten the front and rear trailing arm bolts and torque to factory specs.

8. Grease the urethane bushings using a quality synthetic grease (555-4416 trailing arms).

9. Repeat steps 2 through 9 for the other trailing arm.

10. Re-check all bolts and make sure everything is secured properly. Take a short test drive and re-inspect the installation.

Control arms should be inspected regularly for safety.

555-4416/17

©Steeda Autosports Inc. All Rights Reserved 2004

Street/RaceLowerControlArm.doc

Thank you for choosing STEEDA. Any questions and/or comments on these instructions please contact us at (954) 960-0774 or e-mail us at gofast@steeda.com